

FLOODLIGHT  
PROJEKTÖR





## LERNA

### Technical Specifications | Teknik Özellikler

Body	: Aluminium
Glass	: Tempered
Lens	: PMMA
Light Source	: High Power LED
CRI	: Ra>80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 7016
Usage	: Wall
IP	: IP66

Gövde	: Alüminyum
Cam	: Tamperli
Lens	: PMMA
Işık Kaynağı	: High Power LED
CRI	: Ra>80
Giriş Gerilimi	: 220-240V AC 50/60Hz
Gövde Rengi	: Ral 7016
Kullanım Şekli	: Duvar
IP	: IP66

### Product Chart | Ürün Tablosu


Product Code	Power	CCT/K	Lumen
SML700.340.P55.00.075.40	75W	4000K	9.000
SML700.340.P55.00.100.40	100W	4000K	12.000
SML700.340.P55.00.120.40	120W	4000K	14.000
SML700.340.P55.00.075.65	75W	6500K	9.000
SML700.340.P55.00.100.65	100W	6500K	12.000
SML700.340.P55.00.120.65	120W	6500K	14.000

### Options | Opsiyonlar


DALI Compatible

DALI Uyumlu

### Dimensions | Ölçüler

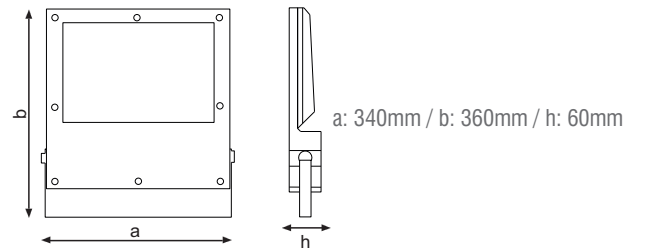

### Photometric Data | Fotometrik Veri





## VIRGO

### Technical Specifications | Teknik Özellikler

Body	: Aluminium
Glass	: Tempered
Lens	: PMMA
Light Source	: High Power LED
CRI	: Ra>80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 7016
Usage	: Wall
IP	: IP66

Gövde	: Alüminyum
Cam	: Tamperli
Lens	: PMMA
Işık Kaynağı	: High Power LED
CRI	: Ra>80
Giriş Gerilimi	: 220-240V AC 50/60Hz
Gövde Rengi	: Ral 7016
Kullanım Şekli	: Duvar
IP	: IP66

### Product Chart | Ürün Tablosu


Product Code	Power	CCT/K	Lumen
SML700.267.P55.00.050.40	50W	4000K	6.000
SML700.267.P55.00.060.40	60W	4000K	7.000
SML700.267.P55.00.075.40	75W	4000K	9.000
SML700.267.P55.00.100.40	100W	4000K	12.000
SML700.267.P55.00.050.65	50W	6500K	9.000
SML700.267.P55.00.060.65	60W	6500K	12.000
SML700.267.P55.00.075.65	75W	6500K	14.000
SML700.267.P55.00.100.65	100W	6500K	17.000

### Options | Opsiyonlar

DALI Compatible


DALI Uyumlu

### Dimensions | Ölçüler



a: 267mm / b: 410mm / h: 72mm

### Photometric Data | Fotometrik Veri





## REFLECT-S

### Technical Specifications | Teknik Özellikler

Body	: Aluminium
Glass	: Tempered
Lens	: PMMA
Light Source	: High Power LED
CRI	: Ra>80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 7016
Usage	: Wall
IP	: IP66

Gövde	: Alüminyum
Cam	: Tamperli
Lens	: PMMA
Işık Kaynağı	: High Power LED
CRI	: Ra>80
Giriş Gerilimi	: 220-240V AC 50/60Hz
Gövde Rengi	: Ral 7016
Kullanım Şekli	: Duvar
IP	: IP66

### Product Chart | Ürün Tablosu


Product Code	Power	CCT/K	Lumen
SML700.280.P55.00.050.40	40W	4000K	4.800
SML700.280.P55.00.060.40	60W	4000K	7.200
SML700.280.P55.00.080.40	80W	4000K	9.600
SML700.280.P55.00.100.40	100W	4000K	12.000
SML700.280.P55.00.050.65	40W	6500K	4.800
SML700.280.P55.00.060.65	60W	6500K	7.200
SML700.280.P55.00.080.65	80W	6500K	9.600
SML700.280.P55.00.100.65	100W	6500K	12.000

### Options | Opsiyonlar

DALI Compatible


DALI Uyumlu

### Dimensions | Ölçüler



a: 267mm / b: 410mm

### Photometric Data | Fotometrik Veri

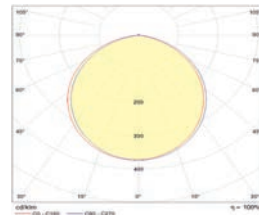



## REFLECT-L

### Technical Specifications | Teknik Özellikler

Body	: Aluminium
Glass	: Tempered
Lens	: PMMA
Light Source	: High Power LED
CRI	: Ra>80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 7016
Usage	: Wall
IP	: IP66

Gövde	: Alüminyum
Cam	: Tamperli
Lens	: PMMA
Işık Kaynağı	: High Power LED
CRI	: Ra>80
Giriş Gerilimi	: 220-240V AC 50/60Hz
Gövde Rengi	: Ral 7016
Kullanım Şekli	: Duvar
IP	: IP66

### Product Chart | Ürün Tablosu


Product Code	Power	CCT/K	Lumen
SML700.420.P55.00.120.40	40W	4000K	4.800
SML700.420.P55.00.150.40	60W	4000K	7.200
SML700.420.P55.00.180.40	80W	4000K	9.600
SML700.420.P55.00.200.40	100W	4000K	12.000
SML700.420.P55.00.120.40	40W	6500K	4.800
SML700.420.P55.00.150.40	60W	6500K	7.200
SML700.420.P55.00.180.40	80W	6500K	9.600
SML700.420.P55.00.200.40	100W	6500K	12.000

### Options | Opsiyonlar

DALI Compatible


DALI Uyumlu

### Dimensions | Ölçüler

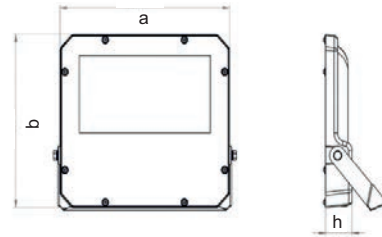

a: 420mm / b: 379mm / h: 65mm

### Photometric Data | Fotometrik Veri







## STORM

### Technical Specifications | Teknik Özellikler

Body	: Aluminium
Glass	: Tempered
Light Source	: Mid Power LED
CRI	: Ra>80
Input Voltage	: 220-240V AC 50/60Hz
Body Color	: Ral 7016
Usage	: Wall
IP	: IP66

Gövde	: Alüminyum
Cam	: Tamperli
Işık Kaynağı	: Mid Power LED
CRI	: Ra>80
Giriş Gerilimi	: 220-240V AC 50/60Hz
Gövde Rengi	: Ral 7016
Kullanım Şekli	: Duvar
IP	: IP66

### Product Chart | Ürün Tablosu


Product Code	Power	CCT/K	Lumen
SML700.420.P55.00.120.40	40W	4000K	4.800
SML700.420.P55.00.150.40	60W	4000K	7.200
SML700.420.P55.00.180.40	80W	4000K	9.600
SML700.420.P55.00.200.40	100W	4000K	12.000
SML700.420.P55.00.120.40	40W	6500K	4.800
SML700.420.P55.00.150.40	60W	6500K	7.200
SML700.420.P55.00.180.40	80W	6500K	9.600
SML700.420.P55.00.200.40	100W	6500K	12.000

### Options | Opsiyonlar

DALI Compatible

DALI Uyumlu

### Dimensions | Ölçüler

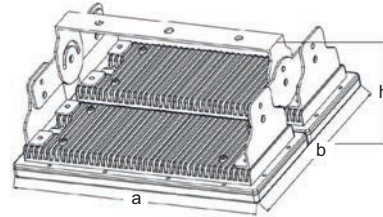

a: 350mm / b: 300mm / h: 150mm

### Photometric Data | Fotometrik Veri

